



GALAKSI DOLUNAY

LED

Suspended Lighting Fixtures With Frosted Diffuser

Luminaire Suspendus Avec Diffuseur Givré

APPLICATION AREAS

Shopping Malls
Supermarkets
Offices
Meeting rooms
Stores
Hospitals
Schools
Corridors

DOMAINES D'UTILISATION

Centres Commerciaux
Supermarchés
Bureaux
Salles de Réunions
Magasins
Hopitaux
Ecoles
Couloirs

BODY

Anodized aluminum with satin finishing. Black and white color options with elegant design.

DIFFUSER

UV stabilized frosted diffuser.

CONVERTER

Long life, low power loss converter with constant current. Compatible with ENEC standards.

LED

LED modules with 60.000 hours lifetime LUMILEDS / SAMSUNG / NICHIA brand LEDs.

SUSPENSION

Composed of 1mm steel wire rope and nickel-plated brass components. Suspension height is adjustable. Supplied with transparent electric cord and ceiling mounted electrical junction box with aesthetic design

CORPS

Corps en aluminium anodisé, satiné. Design élégant. Couleurs blanc, noir disponibles.

DIFFUSEUR

Diffuseur givré. Anti UV.

CONVERTEUR

Convertisseur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant.

LED

Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / SAMSUNG / NICHIA.

SYSTEME DE FIXATION

Composé d'un fil en acier de 1mm, de composants en laiton nickelés. Livré avec un cordon électrique transparent et une boîte de jonction électrique à fixer au plafond. Hauteur de fixation réglable.



Color Options
Options de Couleur



LED Type / Type LED

Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De Couleur (K)	Dimensions (mm) d h	Weight Poids (kg)	Packing Quantity Colisage	Pcs./20" Container Pcs./20" Conteneur
PL8SD16K12C	16	2835 SMD	PCB	1740	2700 - 6500	360 94	3.1	1	1176
PL8SD20K13C	20	2835 SMD	PCB	2145	2700 - 6500	360 94	3.1	1	1176
PL8SD24K14C	24	2835 SMD	PCB	2455	2700 - 6500	360 94	3.1	1	1176
PL8SD23K12C	23	2835 SMD	PCB	2815	2700 - 6500	470 94	5.2	1	730
PL8SD30K13C	30	2835 SMD	PCB	3450	2700 - 6500	470 94	5.2	1	730
PL8SD36K14C	36	2835 SMD	PCB	3995	2700 - 6500	470 94	5.2	1	730
PL8SD36K12C	36	2835 SMD	PCB	4420	2700 - 6500	600 94	6.5	1	470
PL8SD46K13C	46	2835 SMD	PCB	5420	2700 - 6500	600 94	6.5	1	470
PL8SD57K14C	57	2835 SMD	PCB	6300	2700 - 6500	600 94	6.5	1	470
PL8SD78K12C	78	2835 SMD	PCB	9865	2700 - 6500	900 94	7.2	1	220
PL8SD100K13C	100	2835 SMD	PCB	12075	2700 - 6500	900 94	7.2	1	220
PL8SD119K14C	119	2835 SMD	PCB	14000	2700 - 6500	900 94	7.2	1	220
PL8SD153K12C	153	2835 SMD	PCB	19125	2700 - 6500	1200 94	9.3	1	125
PL8SD200K13C	200	2835 SMD	PCB	24000	2700 - 6500	1200 94	9.3	1	125
PL8SD243K14C	243	2835 SMD	PCB	27945	2700 - 6500	1200 94	9.3	1	125

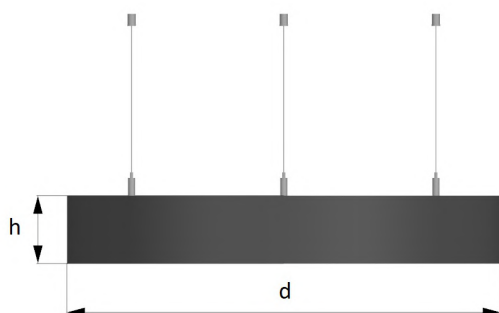

V / Hz 220 - 240 / 50 - 60

Options	Options
Dimmable electronic ballast or convertor. Emergency kit	Ballast électronique dimmable ou converteur. Kit d'urgence.
NOTE	NOTE
Given lumen values are net delivered luminaire output lumens.	Les valeurs de lumens données sont les lumens de sortie nets du luminaire.
Given power values are total consumed AC power of the luminaire.	Les valeurs de puissance données sont la puissance AC totale consommée du luminaire.