



GALAKSI DOLUNAY HORIZON

LED

Suspended Lighting Fixtures With Frosted Diffuser

Luminaire suspendu Avec Diffuseur Givré

APPLICATION AREAS

Shopping Malls
Supermarkets
Offices
Meeting rooms
Stores
Hospitals
Schools
Corridors

DOMAINES D'UTILISATION

Centres Commerciaux
Supermarchés
Bureaux
Salles de Réunions
Magasins
Hopitaux
Ecoles
Couloirs

BODY

Anodized aluminum with satin finishing. Black and white color options with elegant design.

DIFFUSER

UV stabilized frosted diffuser.

CONVERTER

Long life, low power loss converter with constant current. Compatible with ENEC standards.

LED

LED modules with 60.000 hours lifetime LUMILEDS / SAMSUNG / NICHIA brand LEDs.

SUSPENSION

Composed of 1mm steel wire rope and nickel-plated brass components. Suspension height is adjustable. Supplied with transparent electric cord and ceiling mounted electrical junction box with aesthetic design

CORPS

Corps en aluminium anodisé, satiné. Design élégant. Couleurs blanc, noir disponibles.

DIFFUSEUR

Diffuseur givré. Anti UV.

CONVERTEUR

Convertisseur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant.

LED

Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / SAMSUNG / NICHIA.

SYSTEME DE FIXATION

Composé d'un fil en acier de 1mm, de composants en laiton nickelés. Livré avec un cordon électrique transparent et une boîte de jonction électrique à fixer au plafond. Hauteur de fixation réglable.



Color Options
Options de Couleur



LED Type / Type LED

Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De Couleur (K)	Dimensions (mm) d h		Weight Poids (kg)	Packing Quantity Colisage	Pcs./20" Container Pcs./20" Conteneur
PL8SH36K12C	16	2835 SMD	PCB	1875	2700 - 6500	360	94	3.1	1	1176
PL8SH36K13C	20	2835 SMD	PCB	2310	2700 - 6500	360	94	3.1	1	1176
PL8SH36K14C	24	2835 SMD	PCB	2645	2700 - 6500	360	94	3.1	1	1176
PL8SH47K12C	23	2835 SMD	PCB	3035	2700 - 6500	470	94	5.2	1	730
PL8SH47K13C	30	2835 SMD	PCB	3715	2700 - 6500	470	94	5.2	1	730
PL8SH47K14C	36	2835 SMD	PCB	4305	2700 - 6500	470	94	5.2	1	730
PL8SH60K12C	36	2835 SMD	PCB	4760	2700 - 6500	600	94	6.5	1	470
PL8SH60K13C	46	2835 SMD	PCB	5840	2700 - 6500	600	94	6.5	1	470
PL8SH60K14C	57	2835 SMD	PCB	6785	2700 - 6500	600	94	6.5	1	470
PL8SH90K12C	78	2835 SMD	PCB	10625	2700 - 6500	900	94	7.2	1	220
PL8SH90K13C	100	2835 SMD	PCB	13000	2700 - 6500	900	94	7.2	1	220
PL8SH90K14C	119	2835 SMD	PCB	15080	2700 - 6500	900	94	7.2	1	220
PL8SH120K12C	153	2835 SMD	PCB	20600	2700 - 6500	1200	94	9.3	1	125
PL8SH120K13C	200	2835 SMD	PCB	25850	2700 - 6500	1200	94	9.3	1	125
PL8SH120K14C	243	2835 SMD	PCB	30100	2700 - 6500	1200	94	9.3	1	125

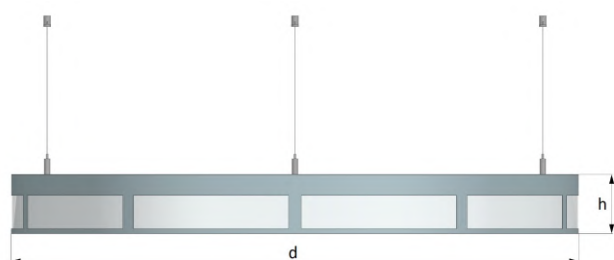

V / Hz		220 - 240 / 50 - 60
Options		Options
Dimmable electronic ballast or convertor. Emergency kit		Ballast électronique dimmable ou converteur. Kit d'urgence.
NOTE		NOTE
Given lumen values are net delivered luminaire output lumens.		Les valeurs de lumens données sont les lumens de sortie nets du luminaire.
Given power values are total consumed AC power of the luminaire.		Les valeurs de puissance données sont la puissance AC totale consommée du luminaire.