


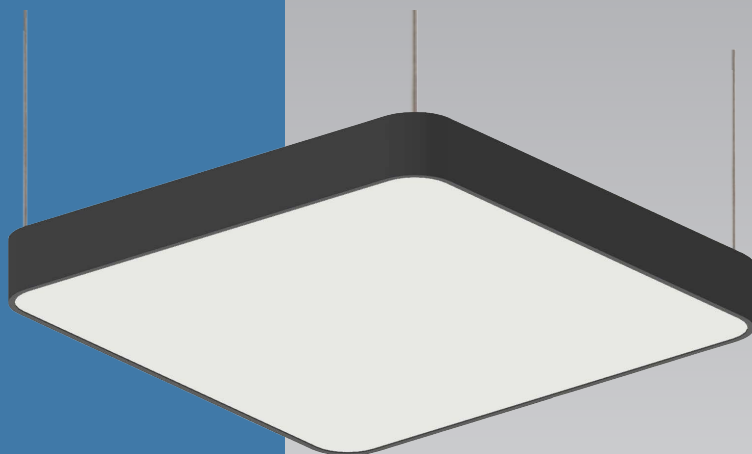

GALAKSI KARE

LED

Suspended Lighting Fixtures With Frosted Diffuser

Luminaire suspendu Avec Diffuseur Givré

APPLICATION AREAS

Shopping Malls
Supermarkets
Offices
Meeting rooms
Stores
Hospitals
Schools
Corridors

DOMAINES D'UTILISATION

Centres Commerciaux
Supermarchés
Bureaux
Salles de Réunions
Magasins
Hopitaux
Ecoles
Couloirs

BODY

Anodized aluminum with satin finishing. Black and white color options with elegant design.

DIFFUSER

UV stabilized frosted diffuser.

CONVERTER

Long life, low power loss converter with constant current. Compatible with ENEC standards.

LED

LED modules with 60.000 hours lifetime LUMILEDS / SAMSUNG / NICHIA brand LEDs.

SUSPENSION

Composed of 1mm steel wire rope and nickel-plated brass components. Suspension height is adjustable. Supplied with transparent electric cord and ceiling mounted electrical junction box with aesthetic design

CORPS

Corps en aluminium anodisé, satiné. Design élégant. Couleurs blanc, noir disponibles.

DIFFUSEUR

Diffuseur givré. Anti UV.

CONVERTEUR

Convertisseur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant.

LED

Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / SAMSUNG / NICHIA.

SYSTEME DE FIXATION

Composé d'un fil en acier de 1mm, de composants en laiton nickelés. Livré avec un cordon électrique transparent et une boîte de jonction électrique à fixer au plafond. Hauteur de fixation réglable.



Color Options
Options de Couleur



LED Type / Type LED

Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De Couleur (K)	Dimensions (mm)			Weight Poids (kg)	Packing Quantity Colisage	Pcs./20" Container Pcs./20" Conteneur
						d1	d2	h			
PL8SDK11E06C	14	2835 SMD	PCB/350	1490	2700 - 6500	300	300	97	3.5	1	1700
PL8SDK12E04C	14	2835 SMD	PCB/350	1470	2700 - 6500	300	600	97	4.5	1	900
PL8SDK12E05C	20	2835 SMD	PCB/500	2100	2700 - 6500	300	600	97	4.5	1	900
PL8SDK13E04C	21	2835 SMD	PCB/350	2165	2700 - 6500	300	900	97	5.5	1	620
PL8SDK13E05C	29	2835 SMD	PCB/500	3150	2700 - 6500	300	900	97	5.5	1	620
PL8SDK14E04C	29	2835 SMD	PCB/350	3020	2700 - 6500	300	1160	97	6.5	1	490
PL8SDK14E05C	42	2835 SMD	PCB/500	4375	2700 - 6500	300	1160	97	6.5	1	490
PL8SDK22E04C	36	2835 SMD	PCB/900	3750	2700 - 6500	600	600	97	7.0	1	480
PL8SDK22E05C	42	2835 SMD	PCB/1050	4375	2700 - 6500	600	600	97	7.0	1	480
PL8SDK22E06C	56	2835 SMD	PCB/1400	5830	2700 - 6500	600	600	97	7.0	1	480
PL8SDK33E03C	62	2835 SMD	PCB/350	6570	2700 - 6500	900	900	97	7.5	1	230
PL8SDK33E05C	89	2835 SMD	PCB/500	9430	2700 - 6500	900	900	97	7.5	1	230
PL8SDK33E06C	125	2835 SMD	PCB/700	13245	2700 - 6500	900	900	97	7.5	1	230

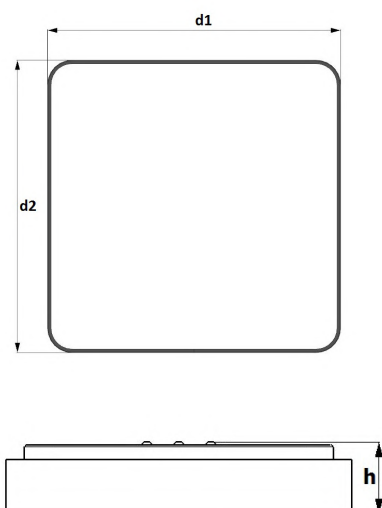

V / Hz 220 - 240 / 50 - 60

Options	Options
Dimmable electronic ballast or convertor. Emergency kit	Ballast électronique dimmable ou converteur. Kit d'urgence.
NOTE	NOTE
Given lumen values are net delivered luminaire output lumens. Given power values are total consumed AC power of the luminaire.	Les valeurs de lumens données sont les lumens de sortie nets du luminaire. Les valeurs de puissance données sont la puissance AC totale consommée du luminaire.