



GALAKSI FREEDOM

LED

Suspended Lighting Fixtures With Frosted Diffuser

Luminaire suspendus Avec Diffuseur Givré

APPLICATION AREAS

Shopping Malls
Supermarkets
Offices
Meeting rooms
Stores
Hospitals
Schools
Corridors

DOMAINES D'UTILISATION

Centres Commerciaux
Supermarchés
Bureaux
Salles de Réunions
Magasins
Hopitaux
Ecoles
Couloirs

BODY

Anodized aluminum with satin finishing. Black and white color options with elegant design.

DIFFUSER

UV stabilized frosted diffuser.

CONVERTER

Long life, low power loss converter with constant current. Compatible with ENEC standards.

LED

LED modules with 60.000 hours lifetime LUMILEDS / SAMSUNG / NICHIA brand LEDs.

SUSPENSION

Composed of 1mm steel wire rope and nickel-plated brass components. Suspension height is adjustable. Supplied with transparent electric cord and ceiling mounted electrical junction box with aesthetic design.

CORPS

Corps en aluminium anodisé, satiné. Design élégant. Couleurs blanc, noir disponibles.

DIFFUSEUR

Diffuseur givré. Anti UV.

CONVERTEUR


Convertisseur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant.

LED

Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / SAMSUNG / NICHIA.

SYSTEME DE FIXATION

Composé d'un fil en acier de 1mm, de composants en laiton nickelés. Livré avec un cordon électrique transparent et une boîte de jonction électrique à fixer au plafond. Hauteur de fixation réglable.

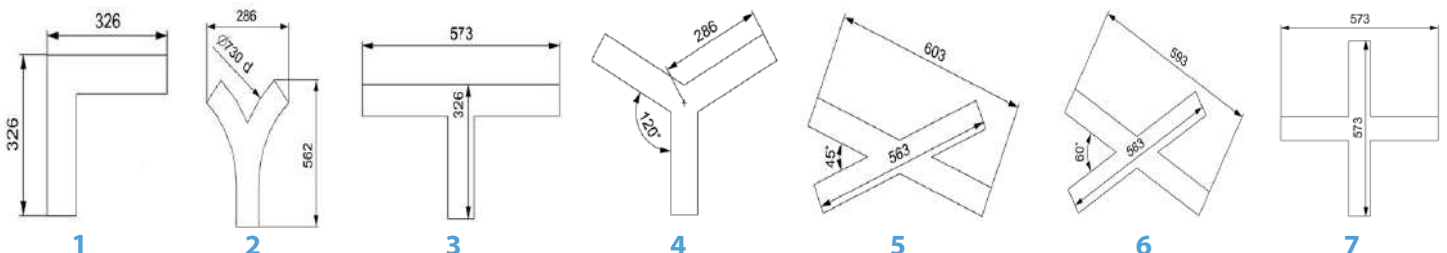

Color Options
Options de Couleur



LED Type / Type LED

Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De Couleur (K)	Dimensions (mm)			Weight Poids (kg)	Shape La Forme
						a	d	h		
PL8S180F3L15C	21	2835 SMD	PCB	1910	2700 - 6500	79	620	89	1,9	
PL8S180F4L15C	26	2835 SMD	PCB	2550	2700 - 6500	79	800	89	2,6	
PL8S180F5L15C	33	2835 SMD	PCB	3185	2700 - 6500	79	980	89	3,3	
PL8S180F6L15C	39	2835 SMD	PCB	3820	2700 - 6500	79	1155	89	3,9	
PL8S180F8L15C	53	2835 SMD	PCB	5095	2700 - 6500	79	1500	89	5,1	
PL8S180F10L15C	66	2835 SMD	PCB	6365	2700 - 6500	79	1890	89	5,9	
PL8S180F12L15C	79	2835 SMD	PCB	7640	2700 - 6500	79	2255	89	6,7	
PL8S180F14L15C	92	2835 SMD	PCB	8915	2700 - 6500	79	2610	89	7,7	
PL8S180F16L15C	105	2835 SMD	PCB	10185	2700 - 6500	79	2950	89	8,6	
PL8S90F2L15C	14	2835 SMD	PCB	1275	2700 - 6500	79	800	89	1,5	
PL8S90F3L15C	21	2835 SMD	PCB	1910	2700 - 6500	79	1155	89	2,0	
PL8S90F4L15C	26	2835 SMD	PCB	2550	2700 - 6500	79	1500	89	2,6	
PL8S90F5L15C	33	2835 SMD	PCB	3185	2700 - 6500	79	1890	89	3,3	
PL8S90F6L15C	39	2835 SMD	PCB	3820	2700 - 6500	79	2255	89	3,9	
PL8S90F7L15C	47	2835 SMD	PCB	4455	2700 - 6500	79	2610	89	4,5	
PL8S90F8L15C	53	2835 SMD	PCB	5095	2700 - 6500	79	2950	89	5,1	
PL8S90F9L15C	60	2835 SMD	PCB	5730	2700 - 6500	79	3315	89	5,5	
PL8S90F10L15C	66	2835 SMD	PCB	6365	2700 - 6500	79	3675	89	5,9	
PL8S45F1L15C	8	2835 SMD	PCB	640	2700 - 6500	79	800	89	1,5	
PL8S45F2L15C	14	2835 SMD	PCB	1275	2700 - 6500	79	1500	89	1,5	
PL8S45F3L15C	21	2835 SMD	PCB	1910	2700 - 6500	79	2255	89	2,0	
PL8S45F4L15C	26	2835 SMD	PCB	2550	2700 - 6500	79	2950	89	2,6	
PL8S45F5L15C	33	2835 SMD	PCB	3190	2700 - 6500	79	3675	89	3,3	
Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De	Dimensions (mm)			Weight Poids (kg)	Shape La Forme
PL8SLF1L15C	8	2835 SMD	PCB	640	2700 - 6500	79	282	89	1,5	
PL8SLF2L15C	14	2835 SMD	PCB	1275	2700 - 6500	79	565	89	1,5	
PL8SLF3L15C	21	2835 SMD	PCB	1910	2700 - 6500	79	845	89	2,0	
PL8SLF4L15C	26	2835 SMD	PCB	2550	2700 - 6500	79	1125	89	2,6	
PL8SLF5L15C	33	2835 SMD	PCB	3185	2700 - 6500	79	1405	89	3,3	
PL8SLF6L15C	39	2835 SMD	PCB	3820	2700 - 6500	79	1685	89	3,9	
PL8SLF7L15C	47	2835 SMD	PCB	4455	2700 - 6500	79	1965	89	4,5	
PL8SLF8L15C	53	2835 SMD	PCB	5095	2700 - 6500	79	2254	89	5,1	
PL8SLF9L15C	60	2835 SMD	PCB	5730	2700 - 6500	79	2525	89	5,5	
PL8SLF10L15C	66	2835 SMD	PCB	6365	2700 - 6500	79	2810	89	5,9	
Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De	Dimensions (mm)		Weight Poids (kg)	Shape La Forme	
PL8SCF2L15C	14	2835 SMD	PCB	1275	2700 - 6500	79	89	1,5	1	
PL8SAF3L15C	21	2835 SMD	PCB	1910	2700 - 6500	79	89	2,0	2	
PL8STF3L15C	21	2835 SMD	PCB	1910	2700 - 6500	79	89	2,0	3	
PL8SYF3L15C	21	2835 SMD	PCB	1910	2700 - 6500	79	89	2,0	4	
PL8S45KF4L15C	26	2835 SMD	PCB	2550	2700 - 6500	79	89	2,6	5	
PL8S60KF4L15C	26	2835 SMD	PCB	2550	2700 - 6500	79	89	2,6	6	
PL8S90KF4L15C	26	2835 SMD	PCB	2550	2700 - 6500	79	89	2,6	7	