



## ASİMETRİK

### LED

#### Sıva Altı Difüzörlü Aydınlatma Armatürleri

#### Recessed Lighting Fixtures With Diffuser

#### Luminaires Encastrés Avec Diffuseur

#### UYGULAMA ALANLARI

Alışveriş Merkezleri  
Marketler  
Ofisler  
Toplantı odaları  
Mağazalar  
Hastaneler  
Okullar  
Koridorlar

#### APPLICATION AREAS

Shopping Malls  
Supermarkets  
Offices  
Meeting rooms  
Stores  
Hospitals  
Schools  
Corridors

#### DOMAINES D'UTILISATION

Centres Commerciaux  
Supermarchés  
Bureaux  
Salles de Réunion  
Magasins  
Hopitaux  
Ecoles  
Couloirs

#### GÖVDE

Zarif tasarıma sahip, gümüş ve beyaz renk seçenekli alüminyum.

#### DİFÜZÖR

UV korumalı PC difüzör

#### KONVERTÖR

ENEC standartlarına uygun, uzun ömürlü sabit akımlı konvertör.

#### LED

50.000 saat ömürlü LUMILEDS / OSRAM / NICHIA marka LED'li LED modüller.

#### BODY

White or silver color options aluminum.

#### DIFFUSER

UV stabilized PC diffuser.

#### CONVERTER

Long life, low power loss converter with constant current. Compatible with ENEC standards.

#### LED

LED modules with 50,000 hours lifetime LUMILEDS / OSRAM / NICHIA brand LEDs.

#### CORPS

Corps en aluminium de couleurs argent et blanc disponibles. Design Elegant.

#### DIFFUSEUR

Diffuseur en PC anti UV.

#### CONVERTEUR

Convertisseur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant .

#### LED

Modules LED – Durée de vie 50.000 heures avec LED de marque LUMILEDS / OSRAM / NICHIA.



Renk Seçenekleri  
Color Options  
Options de Couleur



LED'li Tip / LED Type / Type LED

Renk Geri Verim Indexi / Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Kod Code	Güç Power Puissance (W)	LED Tipi LED Type Type De LED	LED Modül LED Module Module LED	Işık Akısı Lum. Flux Flux Lum. (lm)	Renk Sıcaklığı Color Temperature Température De Couleur (K)	Ölçüler Dimensions (mm) a l h			Ağırlık Weight Poids (kg)	Ambalaj Adedi Packing Quantity Colisage	Adet/20" Konteyner Pcs./20" Container
PL15A13L15C	3x6,3	2835 SMD	PCB	2700	2700 - 6500	88	861	91	1.7	2	2830
PL15A13L25C	3x9,5	2835 SMD	PCB	4050	2700 - 6500	88	861	91	1.8	2	2830
PL15A14L15C	4x6,3	2835 SMD	PCB	3600	2700 - 6500	88	1141	91	2.1	2	2160
PL15A14L25C	4x9,5	2835 SMD	PCB	5400	2700 - 6500	88	1141	91	2.2	2	2160
PL15A15L15C	5x6,3	2835 SMD	PCB	4500	2700 - 6500	88	1422	91	2.5	2	1760
PL15A15L25C	5x9,5	2835 SMD	PCB	6750	2700 - 6500	88	1422	91	2.6	2	1760
PL15A16L15C	6x6,3	2835 SMD	PCB	5400	2700 - 6500	88	1710	91	2.9	2	1450
PL15A16L25C	6x9,5	2835 SMD	PCB	8100	2700 - 6500	88	1710	91	3.0	2	1450
PL15A17L15C	7x6,3	2835 SMD	PCB	6300	2700 - 6500	88	1999	91	3.3	2	1250
PL15A17L25C	7x9,5	2835 SMD	PCB	9450	2700 - 6500	88	1999	91	3.5	2	1250
PL15A18L15C	8x6,3	2835 SMD	PCB	7200	2700 - 6500	88	2280	91	3.7	2	1100
PL15A19L15C	9x6,3	2835 SMD	PCB	8100	2700 - 6500	88	2560	91	4.1	2	980
PL15A10L15C	10x6,3	2835 SMD	PCB	9000	2700 - 6500	88	2837	91	4.5	2	890

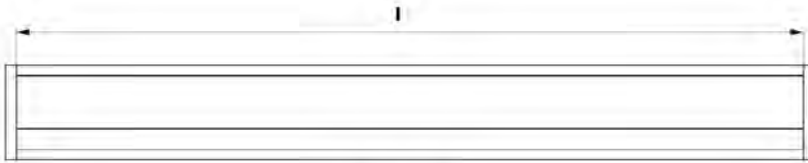

V / Hz 220 - 240 / 50 - 60

Opsiyonlar	Options	Options
DIM edilebilir konvertör.	Dimmable converter.	Convertisseur dimmable.
Acil durum kiti.	Emergency kit.	Kit d'urgence.