



ETANJ WATERPROOF ETANCHE

T26 (T8)

1X Etanj Aydınlatma Armatürleri

1X Waterproof Lighting Fixtures

Luminaire Etanches 1X

UYGULAMA ALANLARI

Fabrikalar
Endüstriyel Mutfaklar
Çamaşırhaneler
Otoparklar
Açık Alanlar
Tüneller

APPLICATION AREAS

Factories
Industrial Kitchens
Laundries
Parking Areas
Outdoor Areas
Tunnels

DOMAINES D'UTILISATION

Usines
Cuisines Industrielles
Blanchisseries
Parkings
Espaces Extérieurs
Tunnels

GÖVDE

Polikarbon veya ABS gri renkli gövde ve polikarbon kilitlenme mandalları.

DİFÜZÖR

Yüksek ışık geçirgenliğine sahip polikarbon difüzör.

ASKI SACI

0.5 mm kalınlığında paslanmaz çelik sac.

REFLEKTÖR

Beyaz elektrostatik toz boyalı, 0.5 mm DKP sac.

BALAST

EN normlarına uygun manyetik yada elektronik balast.

BODY

Polycarbonate or ABS body of gray color with polycarbonate diffuser holder.

DIFFUSER

Polycarbonate diffuser with high light transparency.

CEILING FIXING BRACE

Stainless steel sheet metal with 0.5 mm thickness.

REFLECTOR

White electrostatic powder coated, sheet metal with 0.5 mm thickness.

BALLAST

Electronic or magnetic ballast with EN norms.

CORPS

Corps gris en Polycarbonate ou ABS avec porteur du diffuseur en polycarbonate.

DIFFUSEUR

En polycarbonate. Permet une très grande diffusion de la lumière.

ACCOLADE DE FIXATION AU PLAFOND

Feuille d'acier inoxydable de 0.5 mm d'épaisseur.

REFLECTEUR

Feuille métallique de 0.5 mm d'épaisseur et peinte en blanc électrostatiquement.

BALLAST

Ballast électronique ou magnétique. Compatible avec les standards ENEC.




T8 Floresanlı Tip / T8 Fluorescent Type / Type T8 Fluorescent

Kod Code	Güç Power Puissance (W)	Ampul Tipi Lamp Type Type De Lampe	Duy Tipi Socket Type Type De Douille	Işık Akısı Lum. Flux Flux Lum. (lm)	Akım Current Courant (A)	Ölçüler Dimensions (mm)			Ağırlık Weight Poids (kg)	Ambalaj Adedi Packing Quantity Colisage	Adet/20" Konteyner Pcs./20" Container Pcs./20" Conteneur	Balast Tipi Ballast Type Type de Balast
						a	b	h				
EAMB118	1x18	T26 (T8)	G13	1350	0.37	670	95	102	1.30	9	4230	Manyetik Magnetic Magnétique
EAMB136	1x36	T26 (T8)	G13	3250	0.43	1280	95	102	1.99	9	2250	
EAEB118	1x18	T26 (T8)	G13	1350	0.08	670	95	102	0.99	9	4230	Elektronik Electronic Electronique
EAEB136	1x36	T26 (T8)	G13	3250	0.17	1280	95	102	1.70	9	2250	
EAEB158	1x58	T26 (T8)	G13	5200	0.24	1570	95	102	2.05	6	1710	

Led Tüp Tesisatlı / With Led Tube Wiring / Avec Cablage Led Tube

Kod Code	Ampul Tipi Lamp Type Type De Lampe	Duy Tipi Socket Type Type De Douille	Ölçüler Dimensions (mm)			Ağırlık Weight Poids (kg)	Ambalaj Adedi Packing Quantity Colisage	Adet/20" Konteyner Pcs./20" Container Pcs./20" Conteneur
			a	b	h			
EA118LT	T26(T8)	G13	670	95	102	0,85	9	4230
EA136LT	T26(T8)	G13	1280	95	102	1,55	9	2250
EA158LT	T26(T8)	G13	1570	95	102	1,95	6	1710

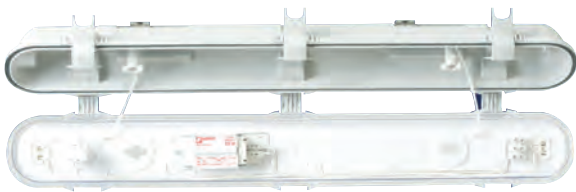

V / Hz 220 - 240 / 50 - 60

Opsiyonlar	Options	Options
DIM edilebilir elektronik balast .	Dimmable electronic ballast.	Ballast électronique dimmable.
Acil durum kiti.	Emergency kit.	Kit d'urgence.

