

## VEGA Y

### LED

Sıva Üstü Buzlu Difüzörlü  
Aydınlatma Armatürleri

Surface Mounted Lighting  
Fixtures With Frosted Diffuser

Luminaire Apparents  
Avec Diffuseur Givré

#### UYGULAMA ALANLARI

Alışveriş Merkezleri  
Marketler  
Ofisler  
Toplantı odaları  
Mağazalar  
Hastaneler  
Okullar  
Koridorlar

#### APPLICATION AREAS

Shopping Malls  
Supermarkets  
Offices  
Meeting rooms  
Stores  
Hospitals  
Schools  
Corridors

#### DOMAINES D'UTILISATION

Centres Commerciaux  
Supermarchés  
Bureaux  
Salles de Réunion  
Magasins  
Hopitaux  
Ecoles  
Coulors

#### GÖVDE

Beyaz, gümüş, siyah renk seçenekleri ile zarif tasarıma sahip alüminyum.

#### DİFÜZÖR

UV korumalı buzlu difüzör.

#### KONVERTÖR

ENEC standartlarına uygun, uzun ömürlü sabit akımlı konvertör.

#### LED

60.000 saat ömürlü LUMILEDS / OSRAM / NICHIA marka LED'li LED modüller.

#### BODY

Anodized aluminum with satin finishing. Black, white and silver color options with elegant design.

#### DIFFUSER

UV stabilized frosted diffuser.

#### CONVERTER

Long life, low power loss converter with constant current. Compatible with ENEC standards.

#### LED

LED modules with 60.000 hours lifetime LUMILEDS / OSRAM / NICHIA brand LEDs.

#### CORPS

Corps en aluminium anodisé, satiné. Design élégant. Couleurs blanc, argent et noir disponibles.

#### DIFFUSEUR

Diffuseur givré. Anti UV.

#### CONVERTEUR

Convertisseur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant.

#### LED

Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / OSRAM / NICHIA.



Renk Seçenekleri  
Color Options  
Options de Couleur



LED'li Tip / LED Type / Type LED

Renk Geri Verim Indexi / Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra>80

Kod Code	Güç Power Puissance (W)	LED Tipi LED Type Type De LED	LED Modül LED Module Module LED	Işık Akısı Lum. Flux Flux Lum. (lm)	Renk Sıcaklığı Color Temperature Température De Couleur (K)	Ölçüler Dimensions (mm) a b h			Ağırlık Weight Poids (kg)	Ambalaj Adedi Packing Quantity Colisage	Adet/20" Konteyner Pcs./20" Container
PL7UY22L15C	6x6,3	2835 SMD	PCB	5400	2700 - 6500	855	1000	99	4.3	1	190
PL7UY33L15C	9x6,3	2835 SMD	PCB	8100	2700 - 6500	1252	1479	99	6.1	1	95
PL7UY44L15C	12x6,3	2835 SMD	PCB	10800	2700 - 6500	1649	1958	99	8.2	1	54
PL7UY55L15C	15x6,3	2835 SMD	PCB	13500	2700 - 6500	2045	2437	99	10.5	1	35

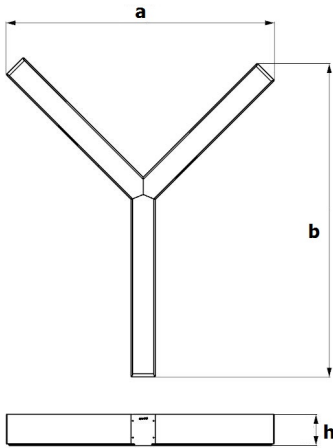

V / Hz 220 - 240 / 50 - 60

Opsiyonlar	Options	Options
DIM edilebilir elektronik balast yada konvertör. LED'li modeller için acil durum kit.	Dimmable electronic ballast or convertor. Emergency kit for models with LED	Ballast électronique dimmable ou converteur. Kit d'urgence pour les modèles LED.
NOT	NOTE	NOTE
Belirtilen lümen değerleri LED üzerindeki lümen değerleridir.	Given lumen values are values on LED.	Les valeurs de lumen données sont les valeurs sur LED.
Belirtilen güç değerleri LED üzerindeki DC güç değerleridir.	Given power values are DC power values on LED.	Les valeurs de puissance données sont les valeurs de courant continu puissance sur LED.