

SIMETRI SLIM DIRECT / INDIRECT

LED

Suspended Lighting Fixtures With Frosted Diffuser

Luminaire Suspendus Avec Diffuseur Givré

APPLICATION AREAS

Shopping Malls
Supermarkets
Offices
Meeting rooms
Stores
Hospitals
Schools
Corridors

DOMAINES D'UTILISATION

Centres Commerciaux
Supermarchés
Bureaux
Salles de Réunions
Magasins
Hopitaux
Ecoles
Couloirs

BODY

Anodized aluminum with satin finishing. Black and white color options with elegant design.

DIFFUSER

UV stabilized frosted diffuser.

CONVERTER

Long life, low power loss converter with constant current. Compatible with ENEC standards.

LED

LED modules with 60.000 hours lifetime LUMILEDS / SAMSUNG / NICHIA brand LEDs.

SUSPENSION

Composed of 1mm steel wire rope and nickel-plated brass components. Suspension height is adjustable. Supplied with transparent electric cord and ceiling mounted electrical junction box with aesthetic design

CORPS

Corps en aluminium anodisé, satiné. Design élégant. Couleurs blanc, noir disponibles.

DIFFUSEUR

Diffuseur givré. Anti UV.

CONVERTEUR

Convertisseur, conforme aux normes ENEC. Longue vie. Perte de puissance faible avec courant constant .


LED

Modules LED – Durée de vie 60.000 heures avec LED de marque LUMILEDS / SAMSUNG / NICHIA.

SYSTEME DE FIXATION

Composé d'un fil en acier de 1mm , de composants en laiton nickelés. Livré avec un cordon électrique transparent et une boîte de jonction électrique à fixer au plafond. Hauteur de fixation réglable.

Indirect Lighting
Éclairage Indirect



Direct Lighting
Éclairage Direct



Color Options
Options de Couleur



LED Type / Type LED

Color Rendering Index / Indice de Rendu des Couleurs: (CRI): Ra > 80

Code	Power Puissance (W)	LED Type Type De LED	LED Module Module LED	Lum. Flux Flux Lum. (lm)	Color Temperature Température De Couleur (K)	Dimensions (mm)			Weight Poids (kg)	Packing Quantity Colisage	Pcs./20" Container Pcs./20" Conteneur
						a	l	h			
PL21ES21L15C	14/8	2835 SMD	PCB	1290/665	2700 - 6500	40	570	76	1.4	6	4362
PL21ES32L15C	21/14	2835 SMD	PCB	1940/1330	2700 - 6500	40	850	76	1.8	6	4362
PL21ES43L15C	26/21	2835 SMD	PCB	2585/1995	2700 - 6500	40	1130	76	2.3	6	3402
PL21ES54L15C	33/26	2835 SMD	PCB	3230/2660	2700 - 6500	40	1410	76	2.8	6	2754
PL21ES65L15C	39/33	2835 SMD	PCB	3875/3325	2700 - 6500	40	1693	76	3.3	6	2364
PL21ES76L15C	47/39	2835 SMD	PCB	4520/3990	2700 - 6500	40	1973	76	3.8	6	1872
PL21ES87L15C	53/47	2835 SMD	PCB	5170/4655	2700 - 6500	40	2254	76	4.3	6	1872
PL21ES98L15C	60/53	2835 SMD	PCB	5815/5320	2700 - 6500	40	2534	76	4.8	6	1506
PL21ES109L15C	66/60	2835 SMD	PCB	6460/5985	2700 - 6500	40	2815	76	5.3	6	1506

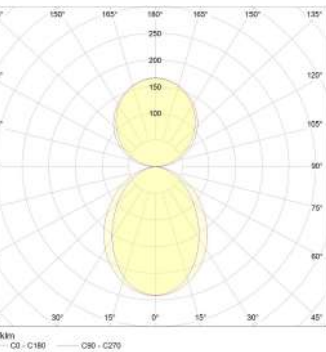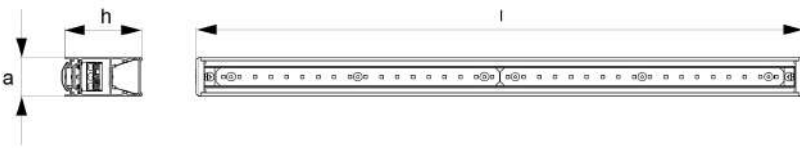

NOTE	NOTE
Given lumen values are net delivered luminaire output lumens.	Les valeurs de lumens données sont les lumens de sortie nets du luminaire.
Given power values are total consumed AC power of the luminaire.	Les valeurs de puissance données sont la puissance AC totale consommée du luminaire.

V / Hz 220 - 240 / 50 - 60

Options	Options
Dimmable electronic ballast or convertor.	Ballast électronique dimmable ou converteur.
Emergency kit	Kit d'urgence.
Magnet cap without screw.	Capuchon magnétique sans vis.

